India's Wind Potential Atlas at 120m agl





NATIONAL INSTITUTE OF WIND ENERGY

CHENNAI

UNDER MINISTRY OF NEW AND RENEWABLE ENERGY, GOVERNMENT OF INDIA

OCTOBER 2019

India's Wind Potential Atlas at 120m agl



NATIONAL INSTITUTE OF WIND ENERGY

CHENNAI

UNDER MINISTRY OF NEW AND RENEWABLE ENERGY, GOVERNMENT OF INDIA

DISCLAIMER

This mapping work is a generalized study and the results can only be considered as indicative, as this includes numerical modelling inputs and various guesstimates with limited measurements. There may be scattered potential pockets available in other states and regions, which can only be identified through a detailed site specific study. Further it is to be noted that the present wind potential estimation is for planning purpose, whereas other aspects related to policy, economics, social acceptance, etc., which may facilitate / hinder the development of projects are to be studied by respective investor/developer.

आर. के. सिंह R. K. SINGH



विद्युत एवं नवीन और नवीकरणीय ऊर्जा राज्य मंत्री (स्वतंत्र प्रभार) एवं कौशल विकास और उद्यमशीलता राज्य मंत्री भारत सरकार

Minister of State (Independent Charge)
for Power and New & Renewable Energy and
Minister of State in the Ministry of Skill Development
and Entrepreneurship
Government of India

FOREWORD

Achieving the Mission of 24x7 Affordable Clean 'Power for All' and ensuring the optimum utilization of natural resources for national development are critical to 'Ujwal Bharat' which will help in realizing Hon'ble Prime Minister of India, Shri Narendra Modi's vision of New India.

I am happy to know that National Institute of Wind Energy is publishing wind potential atlas at 120-meter height. Wind power constitutes a significant share of the country's renewable energy capacity. While the wind sector in India is mature, it has witnessed technological upgradations recently resulting in increased hub height and larger turbine size with a view to better exploit wind conditions.

It needs to be noted that the overall wind energy potential of the country increases to 695 GW at 120-meter as against 302 GW at 100-meter height. Out of 695 GW, 57 GW is possible with CUF of more than 35% and 132 GW with more than 32% CUF.

I am sure the atlas would be useful to all the stakeholders for better utilization of wind resources in the country.

(R. K. Singh)







सचिव भारत सरकार नवीन और नवीकरणीय ऊर्जा मंत्रालय SECRETARY GOVERNMENT OF INDIA MINISTRY OF NEW AND RENEWABLE ENERGY

FOREWORD

I am pleased to know that National Institute of Wind Energy (NIWE), Chennai is publishing wind potential atlas at 120-meter height considering the recent modernization of the wind turbine technology with larger rotor diameter and higher hub heights. As per the wind atlas, our country has the installable wind power potential of 695 GW at 120 m above ground level. For the preparation of this 120 m wind atlas, NIWE had used advanced wind flow model with the corroboration from 406 actual measurement sites spreading across the country. The 120 m wind atlas will provide knowledge of wind availability in the country at higher hub heights and would facilitate the wind power developers & other stakeholders to take considered decisions in determining the techno–economic viability of a wind power project.

The Indian wind industry is nearly thirty years old, and now holds the 4th position in the world with installations of over 36 GW. Wind Power having a share of around 46% in renewable portfolio, has contributed in a substantial measure in the development of renewable energy in the country. With the joint efforts of Ministry, State Nodal Agencies, NIWE, Manufacturers, Developers, Technical Consultants, Financial Institutions, the wind energy sector is firmly on track to achieve the RE target as envisaged by Government of India.

I congratulate all the Scientists, Engineers and other colleagues involved in this activity and assure the continuous support of the Ministry of New and Renewable Energy for wind resource assessment programme from time to time in all years to come.

[Anand Kumar]



PREFACE

The 120m Wind Potential Atlas is prepared at a spatial resolution of 500m, using the advanced meso-micro coupled numerical wind flow model with the corroboration from 406 actual measurement sites spread across the country to cater the need of increased hub heights of wind turbines in the country. It gives an updated overview of the wind climatological situations of India based on numerical meso scale model and reliable measured wind data. The indicative wind potential at 120m agl is estimated by excluding unsuitable area / land features. The potential is further stated in terms of CUF and land categories for effective decision making by all stakeholders. The un-exploited potential areas are also covered for better understanding of new potential locations in the country. The sensitivity analysis on the land use pattern and its suitability is also factored in, to understand the variation on the wind potential estimation. Considering importance of offshore wind in India and also as an emerging area, the report also covers about the Offshore Wind Map of the country.

Based on the estimation, it is noted that the high CUF potential regions are distributed in the states of Andhra Pradesh, Gujarat, Karnataka, Maharashtra and Tamil Nadu with scattered potential in Kerala, Madhya Pradesh, Telangana, Jammu & Kashmir and Rajasthan. Pockets of medium wind potential are located in states of Punjab, Haryana, Uttarakhand, Bihar, West Bengal, Odisha and North Eastern States. However, there may be few pockets in the country where wind could be strong due to local effects and the same could not be captured in the report in the absence of measurements in those pockets. This could be considered in the revised report based on the feedback from the stakeholders. The wind potential map given in the report is indicative and should not to be referred for detailed financial analysis for any site in general.

The Wind Potential Atlas at 120m agl has compiled together with high resolution wind potential map as hard copy for reference. This report has nine chapters. Chapter 1 gives a brief history of wind resource assessment program and previous estimations done at 50m, 80m and 100m height. Chapter 2 explains the methodology adopted for the 120m high wind mapping and potential estimation. Chapter 3 summarizes the numerical modelling and Chapter 4 details about the data sources utilized in mapping. Chapter 5 gives results of the study. Chapter 6 details about the un-exploited potential areas of the country. Chapter 7 covers sensitivity analysis of land category assumptions in potential

estimation and Chapter 8 gives map validation details. The final chapter of this report provides details about the Offshore Wind Potential of the country.

This report is expected to serve as the basis for preliminary site assessment during the prospecting phase of wind project developments in the country, both onshore and offshore. Further, the information will be useful for all stakeholders of the sector including the policy makers, private players, government agencies in their efforts towards achieving the country's ambitious RE goals.

Dr. K. Balaraman, Director General, NIWE

Acknowledgements

The 120m Indian Wind Potential Atlas would not have been possible without the involvement and contribution of numerous individuals, groups and organizations. This report is one of the outcomes of the project, "Integrated Wind and Solar Resource Assessment through Mapping and Measurements" approved by R&D Sectoral Project Appraisal Committee (RDSPAC) of Ministry of New and Renewable Energy (MNRE), Government of India. The project team thanks the Ministry for sponsoring this ambitious project and their support.

At the outset, we would like to express our sincere gratitude to Shri. Anand Kumar, Secretary, MNRE for providing all the necessary support to undertake the study for the preparation of this report. The project team places on record their sincere acknowledgement to Shri. Bhanu Pratap Yadav, Joint Secretary (Wind Energy), MNRE for his support throughout the project's duration and his inputs on the document. The support and guidance provided by Shri. G. Upadhyay, Director (Wind), MNRE along with Dr. Rahul Rawat, Scientist 'B', MNRE in finalizing and publishing the Wind Potential Atlas report is gratefully acknowledged.

We would like to convey special thanks to Shri. B K Panda, Director (Offshore), MNRE, Dr. Prabir Dash, Scientist 'C', MNRE and other Ministry officials who have supported this project.

We thank M/s. Vortex Factoria De Calculs S L, Spain, National Remote Sensing Centre (NRSC / ISRO), Space Application Centre (SAC / ISRO) and all the relevant national and international bodies, who have enabled the required inputs for the work. We acknowledge the excellent and inspiring cooperation of all the NIWE staff, particularly the regular, project staff and the GIS team of Wind Solar Resource Measurements / Offshore Division in bringing the 120m Wind Potential Atlas to this shape through their sincere efforts in data collection, analysis and review.

We also wish to extend our sincere gratitude to all the stakeholders whom we consulted during the course of this study for their cooperation and relevant inputs which were very valuable for this study.

Authors & Contributors

- Dr. K. Balaraman, Director General, NIWE
- Dr. Rajesh Katyal, Deputy Director General (WSOM), NIWE
- Shri. K. Boopathi, Director, NIWE
- Smt. Deepa Kurup, Addl. Director, NIWE
- Shri. A. Hari Bhaskaran, Deputy Director (Technical), NIWE
- Shri. J. Bastin, Deputy Director (Technical), NIWE
- Shri. B. Krishnan, Assistant Director (Technical), NIWE
- Smt. G. Arivukkodi, Assistant Executive Engineer, NIWE
- Shri. R. Vinod Kumar, Junior Engineer, NIWE

TABLE OF CONTENTS

EXECUT	IVE SUMMARY	1
1. INTR	ODUCTION	4
1.1.	Background	4
1.2.	Indian Wind Potential Maps – A Recap	6
2. MET	HODOLOGY	13
2.1.	Deriving Basic Wind Parameters	14
2.2.	Processing of Data Sets	15
2.3.	Preparation of Wind Power Capacity Utilization Factor (% CUF) Map	16
2.4.	Area Exclusion	16
2.5.	Potential Estimation	18
3. ATM	OSPHERIC MODELLING	19
4. DATA	A SOURCES	20
4.1.	Normalized Power Curve	21
5. RESU	ILTS	23
6. UN-E	XPLOITED WIND POTENTIAL	30
7. SENS	ITIVITY ANALYSIS	33
7.1.	WA120-WL:CL:FL - Sensitivity analysis with respect to weightage of land features	33
7.2.	WA120-ES - Sensitivity analysis with respect to suitability of land features	35
8. VALI	DATION	37
9. OFFS	HORE WIND POTENTIAL MAP	39
APPENI	PIX 1 - Sensitivity Analysis	42
ANNEXU	JRE 1 - The History of Wind Resource Assessment Programme in India	50
ANNEXU	JRE 2 - Numerical Modelling	54
ANNEXU	JRE 3 - Data Sources	58

LIST OF FIGURES

Figure 1: Cumulative Growth of Wind Power in India	4			
Figure 2: Wind Monitoring Stations in India	6			
Figure 3: Wind Power Density Map of India at 50m agl	8			
igure 4: Wind Power Density Map of India at 80m agl				
Figure 5: Wind Power Potential Map of India at 100m agl	11			
Figure 6 Outline of the Methodology	13			
Figure 7: Power Curves considered for the study	21			
Figure 8: Normalized Power Curve	22			
Figure 9: Wind Potential Map of India at 120m agl	26			
Figure 10: Wind Potential Map of India at 120m agl (after unsuitable area exclusion)	27			
Figure 11: Existing Wind Turbine Locations of India	31			
Figure 12: Scatter Plot showing the comparison between Estimated and Actual Wind Speed stations				
Figure 13: Offshore Wind speed map up to EEZ at 120m amsl				
Figure 14: Offshore Wind Power Potential Map up to EEZ at 120m amsl				
LIST OF TABLES				
Table 1: Comparison between Indian Wind Atlas 2010 and Indian Wind Potential Map 2015	5 10			
Table 2: Area Exclusion Criteria	17			
Table 3: Grouping of NRSC Land Use Features	18			
Table 4: Data Sources				
Table 5: State-wise Installable Wind Potential (> 25% CUF) at 120m	23			
Table 6: State-wise Wind Potential (WA120-80:30:5) based on Capacity Utilization Factor (<i>(CUF)</i> 28			
Table 7: CUF Matrix for un-exploited windy sites	32			
Table 8: Sensitivity of Wind Potential (> 35% CUF) with respect to weightage of Land featu	res 34			
Table 9: Sensitivity of Wind Potential (> 25% CUF) of Himalayan & North Eastern States wi	ith			
respect to Suitability of Land features	35			



EXECUTIVE SUMMARY

India is blessed with abundant sources of renewable energy and by March 2019 about 77.6 GW RE based capacity has already been installed in the country along with 45.4 GW of large hydro capacity. Out of total RE capacity wind energy represents a significant share of renewable energy portfolio. Wind energy sector is more than two decades old with manufacturing more than 80% of the components under 'Make in India'. Wind energy is also water smart electricity sources with the least water consumption. India is not only committed to refine and strengthen the business and regulatory framework governing wind power in India, but also to provide the necessary and reliable information on wind resources across the entire country.

Wind Turbine technology has evolved significantly over the last decade with emphasis on greater energy capture and improved capacity utilization factor. Modern turbines have larger rotor diameter and higher hub heights. Hence, it became necessary to identify areas which have wind potential at higher heights. Considering this and using advancements of mapping techniques, wind potential assessment of the country at 120m hub height was undertaken. Earlier, NIWE had prepared Indian Wind Atlas at 50m and indicative values at 80m hub heights with 5km resolution in April 2010. In 2015, mapping was revised by corroborating meso-scale derived wind maps and micro-scale measurements and the Indian Wind Potential Map at 100m agl was published.

The present 120m high potential assessment is carried out in similar lines at a spatial resolution of 500m, using the advanced meso-micro coupled numerical wind flow model with the corroboration from 406 actual measurement sites spread across the country. The indicative wind potential at 120m agl is estimated by excluding unsuitable area / land features. The potential is further stated in terms of CUF and land categories for effective decision making by all stakeholders. The un-exploited potential areas are also covered for better understanding of new potential locations in the country. The sensitivity analysis on the land use pattern and its suitability is also factored in, to understand the variation on the wind potential estimation.



Considering importance of offshore wind in India and also as an emerging area, the report also covers about the Offshore Wind Map of the country.

This report is expected to serve as the basis for preliminary site assessment during the prospecting phase of wind project developments in the country, both onshore and offshore. Further, the information will be useful for all stakeholders of the sector including the policy makers, private players, government agencies in their efforts towards achieving the country's ambitious RE goals.

Based on the study, the installable wind potential of the country is estimated as 695 GW at 120m agl (above ground level) with 5D x 7D micro-siting configuration. Out of the total estimated 695 GW potential, 340 GW could be installed in wasteland, 347 GW in cultivable land and 8 GW in forest area. It is also noted that wind potential of 132 GW is possible in high potential areas with CUF greater than 32% and wind potential of about 57 GW is possible in the areas with CUF greater than 35%. Based on the sensitivity analysis with increased land area utilization, the wind potential with over 35% CUF can reach up to 98 GW. While areas with high wind potential and high CUF can be developed into large wind farms, those with lower CUF could be considered for distributed generation and also for wind solar hybrid for better utilization of the RE resources.

It is noted that the high CUF potential regions are distributed in the states of Andhra Pradesh, Gujarat, Karnataka, Maharashtra and Tamil Nadu with scattered potential in Kerala, Madhya Pradesh, Telangana, Jammu & Kashmir and Rajasthan. Pockets of medium wind potential are located in states of Punjab, Haryana, Uttarakhand, Bihar, West Bengal, Odisha and North Eastern States. For better planning and development of wind rich areas of the country, a high resolution map of the country is attached with this report.

Total wind power potential at 120m agl	695 GW
Total wind power potential at 120m agl for waste land	340 GW
Total wind power potential at 120m agl for cultivable land	347 GW
Total wind power potential at 120m agl for forest areas	8 GW



Table E.1: State-wise detailed Wind Potential at 120m agl

CUF			30-	32-		_
C	25-28%	28-30%	32%	35%	>35%	Total
State	(MW)	(MW)	(MW)	(MW)	(MW)	(MW)
Andhra Pradesh	33251	14790	10716	11121	5028	74906
Arunachal Pradesh	83	51	64	63	13	274
Assam	246	0	0	0	0	246
Bihar	3469	181	0	0	0	3650
Chhattisgarh	336	12	0	0	0	348
Goa*	7	1	0	0	0	8
Gujarat	33655	26900	24662	28502	28841	142560
Haryana	419	0	0	0	0	419
Himachal Pradesh	151	0	0	0	0	151
Jammu & Kashmir*	0	0	0	1	2	3
Jharkhand*	0	0	0	0	0	0
Karnataka	53863	29248	20868	14221	5955	124155
Kerala	366	193	180	359	1213	2311
Madhya Pradesh	12103	2398	779	124	0	15404
Maharashtra	47324	20597	14131	12526	3635	98213
Manipur*	0	0	0	0	0	0
Meghalaya*	1	0	0	0	0	1
Mizoram*	0	0	0	0	0	0
Nagaland*	0	0	0	0	0	0
Odisha	6421	1628	287	10	0	8346
Punjab	278	0	0	0	0	278
Rajasthan	98714	27394	1621	27	0	127756
Sikkim*	0	0	0	0	0	0
Tamil Nadu	30183	11524	7057	7446	12540	68750
Telangana	17987	5057	1369	379	43	24835
Tripura*	0	0	0	0	0	0
Uttar Pradesh	101	0	0	0	0	101
Uttarakhand*	22	11	13	6	2	54
West Bengal	1050	0	0	0	0	1050
A & N Islands	392	351	313	199	22	1277
Chandigarh*	0	0	0	0	0	0
Daman, Diu, Dadra*	0	0	0	0	0	0
Delhi*	0	0	0	0	0	0
Lakshadweep	6	1	16	8	0	31
Puducherry	146	92	132	12	0	382
Total	340574	140429	82208	75004	57294	695509

^{*} In these states, even though the wind potential is indicated as negligible based on the applied methodology and land suitability analysis, there can be scattered potential pockets available for wind farm development due to the localized wind flows and such pockets can only be identified through in-situ measurements.



1. INTRODUCTION

1.1. Background

India is blessed with abundant renewable energy resources like solar, wind, hydropower, biomass, etc., and has taken a leap in RE capacity additions in last few years as part of country's commitment towards sustainability. With more than two decades of experience, the wind sector occupies an important place in our RE portfolio.

Wind industry represents successful 'Make in India' narrative with all wind turbines being made in India and over 80% of the components manufactured indigenously. The installed capacity in India has grown on an average of 20% since last twenty years. The year-wise installed wind power capacity is shown in Figure 1. As on 31.03.2019, wind power has contributed more than 35 GW (35625.97 MW)¹ of India's installed capacity. Wind energy also represents water smart electricity resource with least water consuming source of energy where the water requirement is negligible after commissioning as against other forms of electricity generation.

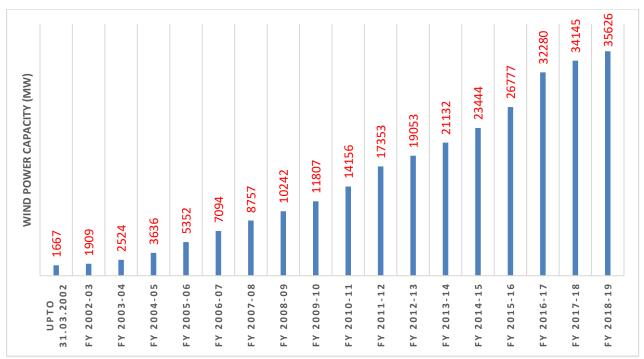


Figure 1: Cumulative Growth of Wind Power in India

¹ https://mnre.gov.in



The government's ambitious goal of installing 100 GW of solar and 60 GW of wind power by 2022 highlights the country's commitment towards sustainable development. In order to meet these ambitious goals, it is necessary to not only refine and strengthen the business and regulatory framework for wind power in India, but also to provide the reliable and updated information on the Indian wind resources.

The report is organised as under:

Chapter 1 gives a brief history of wind resource assessment program and previous estimations done at 50m, 80m and 100m height.

Chapter 2 explains the methodology adopted for the 120m high wind mapping and potential estimation.

Chapter 3 summarizes the numerical modelling and downscaling technique.

Chapter 4 details about the data sources utilized in mapping.

Chapter 5 gives results of the study.

Chapter 6 details about the un-exploited potential areas of the country.

Chapter 7 covers sensitivity analysis of land category assumptions in potential estimation.

Chapter 8 gives map validation details.

Chapter 9, the final chapter of this report provides details about the Offshore Wind Potential of the country.

The present report is expected to serve for prospecting new wind project developments in the country and also for repowering existing wind farms. This report is also expected to serve the needs of policy makers, investors, developers, manufacturers and other government agencies in their efforts to achieve the country's ambitious RE goals.



1.2. Indian Wind Potential Maps - A Recap

The Wind Power development program in India was initiated towards the last year of the Sixth Five Year Plan i.e., in 1983-84. In order to identify wind potential sites in the country, the Government of India launched 'national wind resource assessment program' in 1985. The program was designed for the selection of windy sites, procurement of suitable instruments, design and fabrication of 20m tall masts, their installation at the selected sites and collection & processing of the data. Nodal agency of each state also participated in the implementation of the program. After the establishment of the National Institute of Wind Energy (formerly, C-WET) in Chennai in 1998, the National Wind Resource Assessment Program was transferred to NIWE. Under the program, 50m, 80m, 100m and 120m height masts have been commissioned to collect dedicated wind resource data at multi-levels. As on December 2018, cumulatively 877 stations have been established under the national wind resource assessment program, which resulted in one of the largest wind power specific in-situ data bank in the world. The Ministry has been continuously supporting this programme. The following map depicts wind monitoring stations commissioned in the country till December 2018.

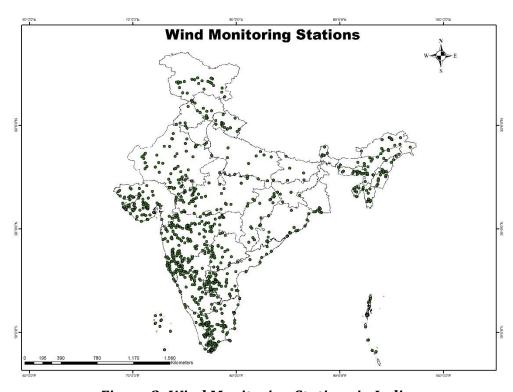


Figure 2: Wind Monitoring Stations in India



As outcome of this program, wind power density maps were also being prepared to indicate the wind potential in the country. In 2005, the wind power potential for 10 states at 50m was estimated. Further, NIWE carried out the potential estimation study at 50m and indicative study at 80m hub heights with 5 km resolution in 2010 in collaboration with RISO-DTU National Laboratory for Sustainable Energy, Roskilde, Denmark using sophisticated meso-scale modelling technique called Karlsruhe Atmospheric Meso-scale Model (KAMM).

In order to estimate the installable potential of the country, the KAMM generated meso-scale wind power density map of 50 m level was integrated with the wind power density map generated with actual measurements and the final wind power density maps were re-plotted using GIS tools. Weightage was given for the topographical features of the area. A uniform 2% land availability was considered for all states except for Himalayan states, North Eastern states and Andaman Nicobar Islands where it was assumed as 0.5%. The installable wind power potential was calculated for each wind power density range by assuming that 9 MW could be installed in each square kilometer area.

The potential in the country at 50m level with these stated assumptions was estimated as 49 GW². Similar exercise carried out for 80m level with the KAMM generated meso scale map gave estimated installable potential as 103 GW². The wind power density maps at 50m and 80m level are given in Figure 3 and Figure 4.

² Indian Wind Atlas, 2010 by C-WET, ISBN 978-81-909823-0-6



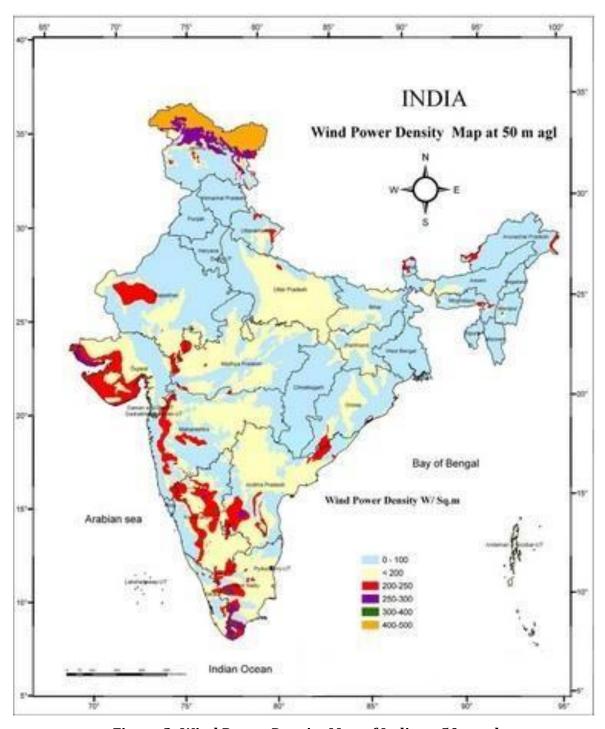


Figure 3: Wind Power Density Map of India at 50m agl



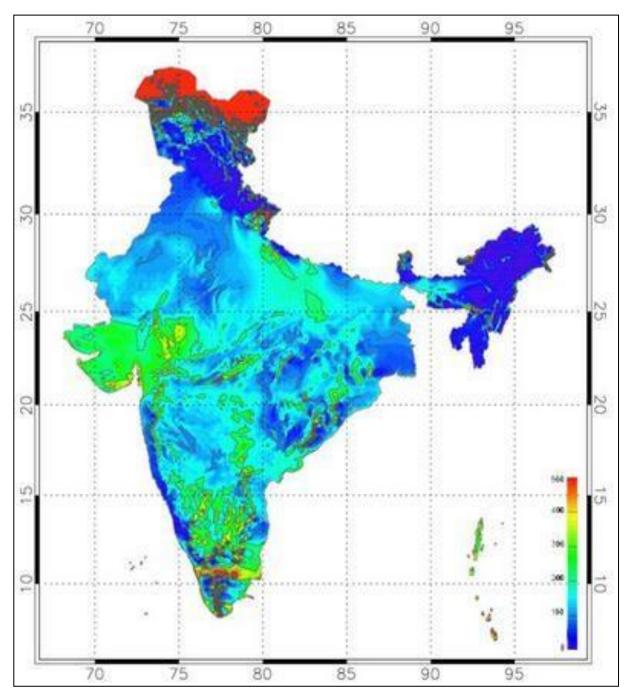


Figure 4: Wind Power Density Map of India at 80m agl

With advancing hub heights, this study was revisited at 100m agl in 2015 and wind power potential at 100m height was estimated as 302 GW 3 . This was carried out at a higher spatial resolution of 500m (as compared to 5m km earlier), using the advanced

³ http://niwe.res.in/department_wra_100m%20agl.php



meso-micro coupled numerical wind flow model and with the corroboration from about 1300 actual measurement sites spread all over India. In addition, the study was performed with actual land availability estimation using National Remote Sensing Centre (NRSC) 56m resolution Land Use Land Cover (LULC) Data and with consideration of 6MW per sq.km. Land features which are not suitable for wind farming were excluded from the potential map with appropriate buffer / set-off. In addition, other developments such as roads, railways, protected areas, airports, etc., were excluded along with land area with elevation more than 1500m and slope more than 20 degree. The suitable land features were grouped into three categories- Wasteland, Cultivable Land and Forest Land and weightage of 80%, 30% and 5% was assigned respectively to these categories. The map was prepared in Capacity Utilization Factor (CUF) scale and CUF more than 20% was considered for potential estimation. The main differences between Indian Wind Atlas 2010 and the Wind Potential Map at 100m agl are shown below in Table 1.

Table 1: Comparison between Indian Wind Atlas 2010 and Indian Wind Potential Map 2015

Parameter	Indian Wind Atlas (2010)	100m Potential Map (2015)	
Flow Model	KAMM - WAsP	WRF	
Model Resolution	5km	0.5km	
Final Outcome	Wind Power Density (WPD)	Capacity Utilization Factor (CUF)	
	map	map	
Height	50m, 80m	100m	
Land Availability	Assumption of 2% for Windy	Actual Land availability	
Estimation	states and 0.5% for poor windy	estimation using NRSC Land Use	
	states	Land Cover (LULC) Data –	
		AWiFS 1:250K	
Validation	Up to 50m	Up to 100m	
GIS layers	Static, digital (Pictorial View)	Dynamic, Online	



The 100m wind potential map is shown as under.

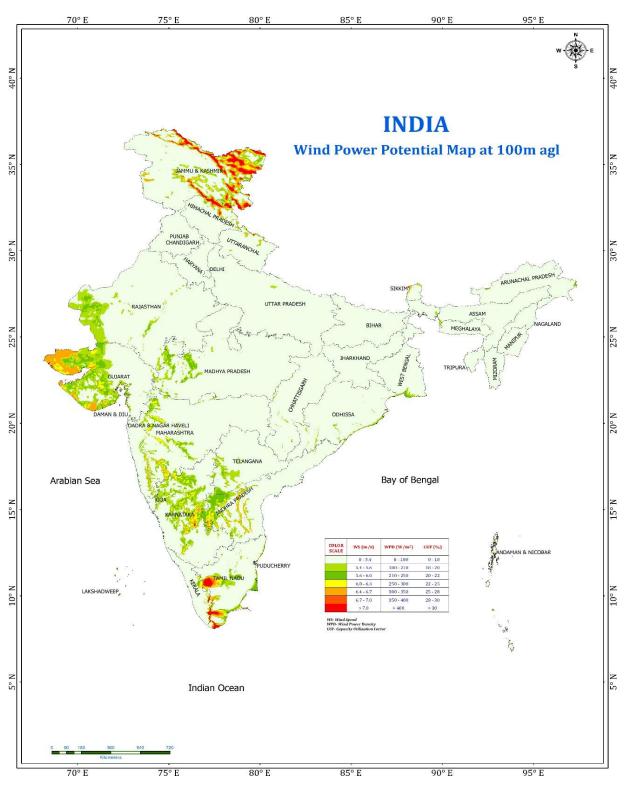


Figure 5: Wind Power Potential Map of India at 100m agl



The present 120m high wind potential map is prepared to cater to increased hub heights of wind turbines. The map has been prepared on similar lines with the 100m wind potential map, incorporating all the advanced mapping techniques. The important features of the Indian Wind Potential Map at 120m agl are as follows:

- The resultant layers are at the resolution of 500m.
- Joint frequency tables have also been derived for the entire country at 500m resolution.
- High-resolution Re-analysis data set has been used for the study NCEP/CFSR (0.5° latitude x 0.5° longitude resolution), which enhanced the accuracy of the mapping.
- Dynamic meso-micro coupled WRF modelling technique was used.
- Around 400 met-mast results were utilized for validation.
- Potential arrived through actual land availability using authentic data sources of Land Use Land Cover (LULC) in GIS format.
- The un-exploited potential (Green field) is explicitly estimated to provide better clarity to the stakeholders and for effective site selection.

The methodology of mapping is detailed in the next chapter.



2. METHODOLOGY

The methodology for the preparation of the 120m wind potential map is represented as under. Subsequent sections explain each of these components.

Deriving basic wind parameters

Processing of

data sets

- •Generation of Basic Wind Parameter Layers for the country at 500m resolution using dynamic meso micro coupled multiscale WRF modelling.
- •10 years of NCEP/CFSR (0.5° latitude x 0.5° longitude resolution) Re-analysis data set is used for initiation of the model.
- Wind Speed, WPD, Weibull A & k, Air Density, Temperature, Joint frequency distribution have been derived.
- Uncertainty estimation.
- Processing model output wind parameter layers.
- Processing of NRSC Land Use Land Cover (LULC) layers.
- National Natural Resources Management System (NNRMS) Lavers.
- •SRTM (1 arc resolution) DEM is also processed for elevation and slope details

Capacity Utilization Factor (%CUF) map preparation

- •Preparing frequency distribution for each 500m grid point using Weibull A & k parameters.
- •2 MW Normalized power curve derivation.
- Preparing Capacity Utilization Factor grid layer for the country at 500m resolution using frequency distribution and normalized power curve (air density corrected at each grid point).
- Arriving P50 %CUF value with standard corrections.
- •Validation of the resultant GIS layer using available actual measurements.

Area exclusion

- •Land features which are not suitable for wind farming has been excluded from the potential map with appropriate buffer / set-off.
- •In addition, other developments such as roads, railways, protected areas, airports, etc., are excluded.
- •Land area with elevation more than 1500m and slope more than 20 degree are also excluded.

Estimation of installable wind power potential

- •Zones with CUF (%) more than 25% are considered for wind potential estimation.
- •The suitable land features have been grouped into 3 ranks (WA120-WL: Wasteland, WA120-CL: Cultivable Land, WA120-FL: Forest Land) and appropriate weightage has been assumed.
- •Installable wind power capacity is estimated by considering 5 MW per sq.km in each CUF range with assumption of 5D x 7D micrositing configuration.

Figure 6: Outline of the Methodology



2.1. Deriving Basic Wind Parameters

Basic wind parameters for the country including its islands has been derived at 120m height with 500m resolution using advanced meso-micro coupled modelling / downscaling techniques. For each 500m grid point the following parameters have been derived.

- Mean Wind Speed (m/s)
- o Weibull Shape factor k
- Weibull Scale factor A (m/s)
- o Mean Wind Power Density (W/m²)
- Mean Temperature (°C)
- o Mean Atmospheric Pressure (KPa)
- o Mean Air Density (Kg/m³)
- Wind Direction
- Joint Frequency Distribution

With long-term wind variation and advancements in assimilation re-analysis data sets into consideration, 10 years of data (2005 – 2014) from high-resolution re-analysis data set, NCEP CFS/CFSR was used to initiate the flow modelling. In the methodology, Weather Research and Forecasting System (WRF) atmospheric model developed by NCAR/NCEP was used. Meso to micro-scale coupling was solved within the modelling chain by seamless simulations of WRF down to 500m resolution.

The Planetary Boundary Layer (PBL) is parameterized by using the Turbulent Kinetic Energy or Mellor Yamada Janic scheme, which makes use of the TKE in order to characterize the turbulent aspects of the wind flow. For the surface layer, NOAH land surface model and Monin Obukov similarity theory options in the WRF model were used. In relation to the characteristics of the modelling domains setup, a large buffer region was used so that any possible issue arising from domain-border numerical problems are cut out of the output for desired accuracy.



2.2. Processing of Data Sets

The study considers various data sets accessed / procured from different sources and were scrutinized to bring them into a common format, so that the processing could be easier and error free.

The wind parameter layers from M/s. Vortex have been validated with actual metmast measurements towards understanding the uncertainty in the modelling. Land Use Land Cover (LULC) data were obtained from NRSC, Hyderabad which were in raster format, with 19 classifications. For convenience and to maintain a common format, the data set for the whole country was converted into vector format using GIS tools, without any smoothening to reproduce the same 56m resolution data set. Buffer analysis of the land features such as settlements, water bodies was carried out based on the pixel count. After classification, the same was converted into vector layer.

National Natural Resources Management System (NNRMS) data sets were accessed through their online portal with dedicated user-link. The layers were already in vector format and the same were utilized in the study as such. In NNRMS data set, separate Telangana and Andhra Pradesh state boundary was not defined. Hence, the Telangana Administrative boundary from Survey of India (SoI) was accessed through georeferencing. With regard to Andhra Pradesh administrative boundary, the Telangana administrative boundary accessed from SoI was extracted from pre-partition Andhra Pradesh administration layer obtained from NNRMS.

In this study, the Shuttle Radar Topography Mission (SRTM) Digital Elevation Model data with 1arcsec (~30m resolution) interval was used for both elevation and slope exclusion. The SRTM pixels with more than 1500m elevation are excluded in the potential area calculation in the base case studies. Similarly, using ArcGIS, the slope values are calculated using SRTM DEM and slopes more than 20 degrees were considered as non-suitable for wind farming and were also excluded in the base case studies.



2.3. Preparation of Wind Power Capacity Utilization Factor (% CUF) Map

The methodology adopted for the derivation of CUF and its mapping is as follows:

- Wind speed frequency distribution at each grid point were calculated by using the wind speed and Weibull shape parameter 'k' for 0 25 m/s.
- A normalized power curve was derived from seven modern wind turbines used in the country with approx. 2 MW capacities. The normalized machine was corrected for air density (IEC method) at each grid point.
- By utilizing both air density corrected power curve and wind speed distribution, gross CUF was estimated for each grid point.
- Standard correction factors as per practice (95% Grid availability, 95% Machine Availability, 3% - Transmission Loss and 10% - Array Loss) was applied to the gross estimates to find out the net values of each grid point at P50 (50% probability of exceedance) confidence level.
- Thematic map for P50 capacity utilization factor (%CUF) was prepared with classifications of less than 20%, 20-25%, 25-28%, 28-30%, 30-32%, 32-35% and greater than 35% ranges.
- As meso-scale models do not reflect the local wind variations perfectly at the complex sites, the model based resultant map was validated with 406 numbers of on-site measurements to understand the map error.

2.4. Area Exclusion

Land features which are not suitable for wind farming were excluded from the potential map with appropriate buffer range.

- NRSC Land Use Land Cover (LULC) data set with Level II classification (AWiFS –
 56m resolution) was utilized for the land suitability analysis in this work.
- In addition, areas covering other land features such as Roads, Railways, Protected Areas, Airports, etc., have been removed (with / without buffers).



- Areas with elevation more than 1500m and slope more than 20 degree have also been removed in the base case studies. The exclusion layers with the appropriate set-off / buffer is shown in Table 2.
- This information was converted into vector layers and excluded from the potential map.

Table 2: Area Exclusion Criteria

S. No.	Land Feature / Development	Function	Range
1	Build Up		
	Build Up - up to 1sq.km	BE	200m
	Build Up - up to 10sq.km	BE	1000m
	Build Up - up to 50sq.km	BE	3000m
	Build Up - up to 100sq.km	BE	5000m
	Build Up - more than 100sq.km	BE	10000m
2	Water Bodies		
	Water Bodies - up to 2sq.km	Е	
	Water Bodies - more than 2sq.km	BE	500m
3	Snow Covered	Е	
4	Gullied	E	
5	Littoral Swamp	BE	500m
6	Elevation more than 1500m	E	
7	Slope more than 20 degree	Е	
8	Golden Quadrilateral Road	BE	500m
9	NH Roads	BE	500m
10	District Roads	BE	200m
11	Rural Roads	BE	2m
12	Railway track	BE	500m
13	Reservoir	BE	500m
14	Rivers	BE	500m
15	Airports	CM	10000m
16	Protected Areas	BE	1000m

BE – Buffered Exclusion, E – Exclusion, CM – Circular Mask

2.5. Potential Estimation

The methodology adopted for the indicative wind potential estimation is as follows:

- Zones only with more than 25% Capacity utilization factor (P50) are considered for wind potential estimation.
- After removing exclusion layers from the potential map, the remaining potential zones are calculated in sq.km.
- Potential area calculation and segregation performed with respect to CUF ranges.
- The suitable land features of NRSC LULC data sets are grouped into three categories as WA120-WL: Wasteland, WA120-CL: Cultivable Land and WA120-FL: Forest Land and the same are detailed in Table 3.
- Appropriate weightage viz., WA120-WL: 80%, WA120-CL: 30%, WA120-FL: 5%, was assumed to estimate the potential. A sensitivity analysis was also carried out to detail the influence of land category in the potential estimation.
- Installable wind power capacity is estimated by considering 5 MW per sq.km in each CUF range with the assumption of 5D x 7D micro-siting configuration (calculated based on the rotor diameter of the normalized turbine).
- The un-exploited wind zones (green field) and their installable potential are calculated by excluding the already installed wind turbine parcels (brown field) from the potential map. The details of the green field potential estimation are provided in Chapter 6.

Table 3: Grouping of NRSC Land Use Features

WA120-WL:	WA120-CL:	WA120-FL:
Wasteland	Cultivable Land	Forest Land
Grass Land	Kharif	Plantation/Orchard
Other Waste Land	Rabi	Evergreen Forest
Scrub Land	Zaid	Deciduous Forest
Rann	Double/Triple	
	Current Fallow	
	Shifting Cultivation	
	Scrub/Deg. Forest	



3. ATMOSPHERIC MODELLING

High-resolution numerical modelling of weather conditions provides sensitive information of good quality, which is crucial for the development of any wind project and are useful from the early stages of prospecting the wind farm design to long-term adjustments. In particular, the use of meso and micro-scale coupled wind resource products has gained widespread acceptance by the wind industry, offering reliable long term reference data for wind condition characterization and the same has been utilized in this work. Under this study, Meso to micro-scale coupling is solved within the modelling chain by seamless simulations of WRF down to 500m resolution.

The core of the technical modelling approach used for this work is the atmospheric model Weather Research and Forecasting System (WRF) developed by NCAR/NCEP. The WRF-system is a community based, open-source model, where the latest advances in physics and numerics are incorporated in a modular way. The WRF model has been employed largely for research, climate analysis and operational weather forecasting. More information about the modelling core and the methodology to derive the parameters are provided in Annexure 2.

In this project, the model was driven by the latest generation of re-analysis data - NCEP CFS/CFSR, Re-gridded versions of SRTM (no-void) altimetry data and ESA Globcover (300m) land use database. The WRF model was used in order to downscale Reanalysis datasets to the final $500m \times 500m$ resolution. In this downscaling process, several nested domains from coarser to finer resolution grids were used, starting at 27km and ending at 0.5km.



4. DATA SOURCES

Considering importance of the outcome, efforts were made to use most of the data sets from authentic sources. However, some of the on-line / private sources have also been used in this study after validation. The data sources are listed in following table.

Table 4: Data Sources

Sl.					
No.	Data Set	Source			
1	WRF Model Inputs	NCEP CFS/CFSR ⁴			
		SRTM ⁵ (Shuttle Radar Topography			
		Mission) three arc-sec			
		• ESA Globcover (300m) ⁶			
2	Land Use Land Cover Data Set for	NRSC ⁷ /ISRO, Hyderabad 56m resolution			
	Land Suitability Estimation	(AWiFS)			
3	Road, Railway lines,	NNRMS ⁸ (National Natural Resource			
	Administrative Boundary (except	Management System)			
	Telangana & Andhra Pradesh*),				
	Reservoir, River details				
4	Elevation and Slope information SRTM (Shuttle Radar Topography Mission)				
		one arc-sec			
5	Airports	Google Earth / Online Sources			
6	Protected Areas	WDPA ⁹ (World Database on Protected			
		Areas) – Polygons with Google Earth			
		verification			

^{*} In NNRMS data set, separate Telangana and Andhra Pradesh state boundary was not defined. Hence, Telangana Administrative boundary from Survey of India (SoI) has been accessed through geo-referencing. With regard to Andhra Pradesh administrative boundary, the Telangana administrative boundary accessed from SoI was extracted from the old Andhra Pradesh administration layer (before-partition) obtained from NNRMS.

⁴https://climatedataguide.ucar.edu/

⁵ https://earthexplorer.usgs.gov/

⁶ http://due.esrin.esa.int/page_globcover.php

⁷ https://www.nrsc.gov.in/

⁸ http://www.moef.gov.in/envis/nnrms.html

 $^{^{9}}$ https://www.iucn.org/theme/protected-areas/our-work/world-database-protected-areas



4.1. Normalized Power Curve

The normalized power curve for the CUF estimation in this study was derived from seven modern wind turbine power curves. The machines which were chosen are in the range of 2 MW capacity and are presently being installed in the country. The rotor diameter was considered as 110m by averaging the rotor diameters of these seven turbines and hub height of the normalized turbine was assumed as 120m. All these seven numbers of power curves have been normalized into a 2 MW power curve. Then the power values against each wind speed has been averaged to obtain the normalized power curve. Figure 7 represents the power curves used in the study after normalization to 2 MW. The 2 MW normalized power curve used for the analysis is represented in Figure 8.

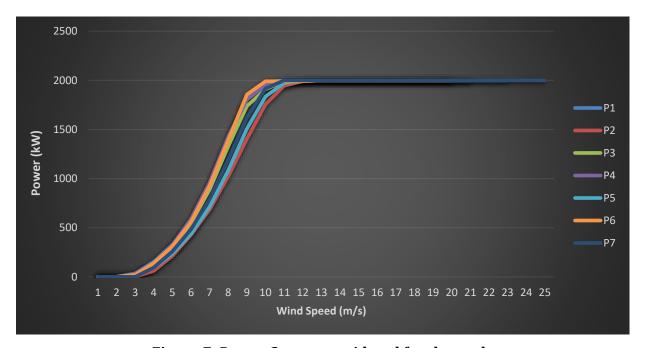


Figure 7: Power Curves considered for the study



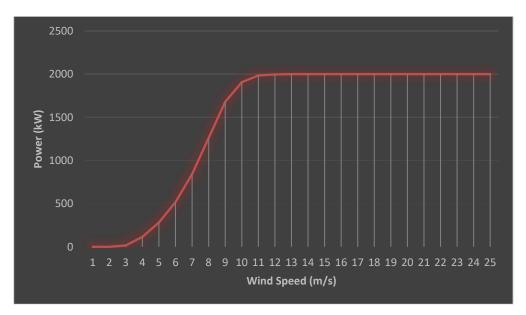


Figure 8: Normalized Power Curve



5. RESULTS

Based on the above methodology, the state-wise wind power installable capacity has been estimated and the details are shown in Table 5. In order to calculate the installable wind potential, land availability was assumed as under:

WA120-WL (Wasteland) : 80% potential land is available
 WA120-CL (Cultivable Land) : 30% potential land is available
 WA120-FL (Forest Land) : 5% potential land is available

Table 5 shows the resultant state-wise installable wind potential with respect to the above Land features categorization i.e., WA120-80:30:5.

Table 5: State-wise Installable Wind Potential (> 25% CUF) at 120m (with respect to Land Categorization)

State	WA120-WL (MW)	WA120-CL (MW)	WA120-FL (MW)	Total (WA120-80:30:5) (MW)
Andhra Pradesh	39922	33216	1768	74906
Arunachal Pradesh	207	20	46	273
Assam	199	45	2	246
Bihar	238	3412	0	3650
Chhattisgarh	21	269	59	349
Goa*	1	2	6	9
Gujarat	75766	66484	310	142560
Haryana	74	342	2	418
Himachal Pradesh	42	104	5	151
Jammu and Kashmir*	3	0	0	3
Jharkhand*	0	0	0	0
Karnataka	29659	92593	1903	124155
Kerala	474	1495	342	2311



State	WA120-WL (MW)	WA120-CL (MW)	WA120-FL (MW)	Total (WA120-80:30:5) (MW)
Madhya Pradesh	5455	9920	30	15405
Maharashtra	58546	38611	1055	98212
Manipur*	0	0	0	0
Meghalaya*	1	0	0	1
Mizoram*	0	0	0	0
Nagaland*	0	0	0	0
Odisha	2473	5609	264	8346
Punjab	12	266	0	278
Rajasthan	95821	31776	159	127756
Sikkim*	0	0	0	0
Tamil Nadu	20175	47164	1410	68749
Telangana	10517	14023	295	24835
Tripura*	0	0	0	0
Uttar Pradesh	1	99	0	100
Uttarakhand*	34	17	3	54
West Bengal	27	989	34	1050
A&N Islands	288	342	648	1278
Chandigarh*	0	0	0	0
D&N Haveli*	0	0	0	0
Daman and Diu*	0	0	0	0
Delhi*	0	0	0	0
Lakshadweep ¹⁰	27	3	1	31
Puducherry	129	244	9	382
Total in MW	340112	347045	8351	695508

^{*} In these states, even though the wind potential is indicated as negligible based on the applied methodology and land suitability analysis, there can be scattered potential pockets available for wind farm development due to the localized wind flows and such pockets can only be identified through insitu measurements.

¹⁰ Based on Actual measurements and extrapolation.



With the above-mentioned assumptions and defined protocol, the installable wind potential of the country is estimated as 695 GW at 120m agl (above ground level).

Out of the total estimated 695 GW potential, 340 GW is possible in wasteland, 347 GW in cultivable land and 8 GW in forest land. As was expected Southern and Western states are majorly contributing to wind potential of the country while other areas with lower wind potential have emerged in other states.

The P50 CUF wind potential map at 120m agl is shown in Figure 9, whereas the technical potential map (after exclusion of unsuitable areas) is shown in Figure 10.

A high resolution map is also given along with this report.



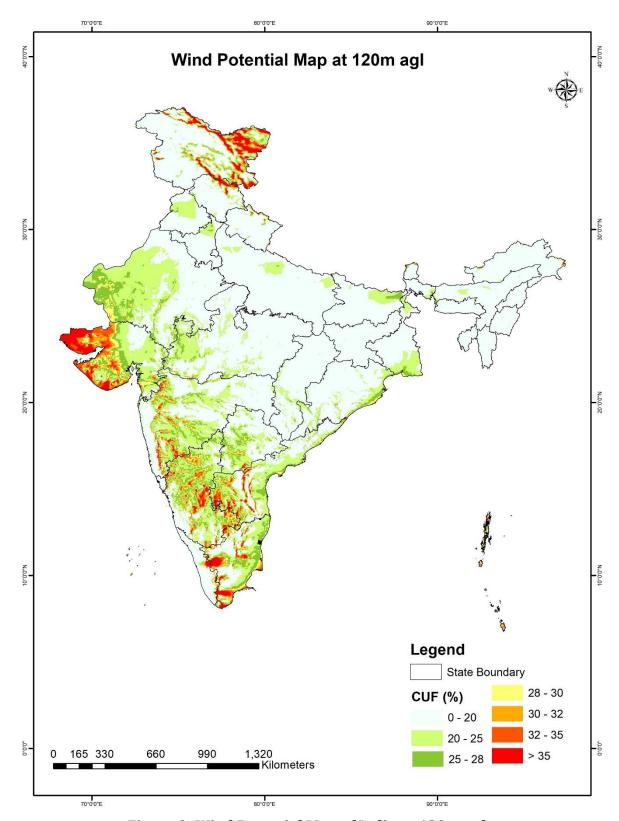


Figure 9: Wind Potential Map of India at 120m agl



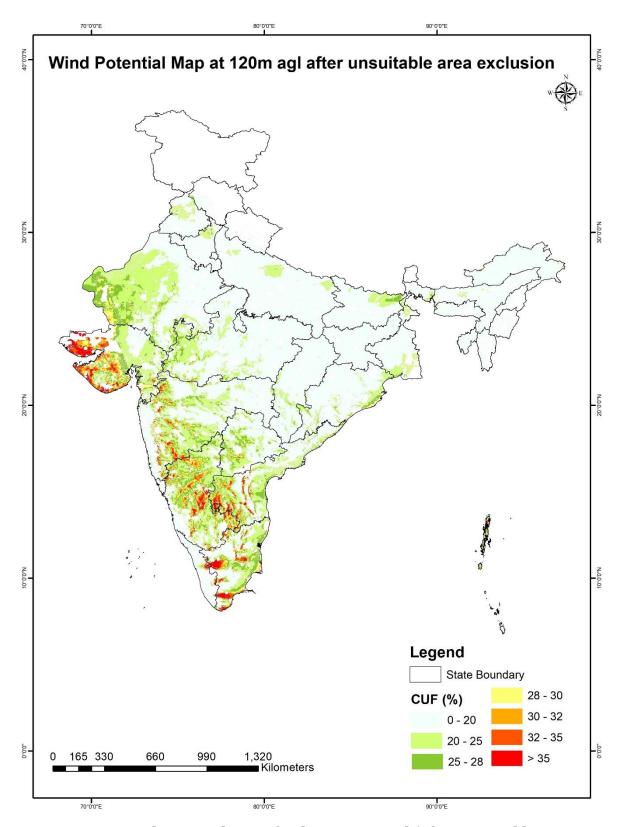


Figure 10: Wind Potential Map of India at 120m agl (after unsuitable area exclusion)



In order to better utilize the wind potential and harness to the maximum extent, state-wise wind potential (base case studies – WA120-80:30:5) based on Capacity Utilization Factor (CUF) is tabulated in table below.

Table 6: State-wise Wind Potential (WA120-80:30:5) based on Capacity Utilization Factor (CUF)

% CUF	25-28%	28-30%	30-32%	32-35%	>35%	Total
State	(MW)	(MW)	(MW)	(MW)	(MW)	(MW)
Andhra Pradesh	33251	14790	10716	11121	5028	74906
Arunachal Pradesh	83	51	64	63	13	274
Assam	246	0	0	0	0	246
Bihar	3469	181	0	0	0	3650
Chhattisgarh	336	12	0	0	0	348
Goa*	7	1	0	0	0	8
Gujarat	33655	26900	24662	28502	28841	142560
Haryana	419	0	0	0	0	419
Himachal Pradesh	151	0	0	0	0	151
J & K*	0	0	0	1	2	3
Jharkhand*	0	0	0	0	0	0
Karnataka	53863	29248	20868	14221	5955	124155
Kerala	366	193	180	359	1213	2311
Madhya Pradesh	12103	2398	779	124	0	15404
Maharashtra	47324	20597	14131	12526	3635	98213
Manipur*	0	0	0	0	0	0
Meghalaya*	1	0	0	0	0	1
Mizoram*	0	0	0	0	0	0
Nagaland*	0	0	0	0	0	0
Odisha	6421	1628	287	10	0	8346
Punjab	278	0	0	0	0	278
Rajasthan	98714	27394	1621	27	0	127756



% CUF	25-28%	28-30%	30-32%	32-35%	>35%	Total
State	(MW)	(MW)	(MW)	(MW)	(MW)	(MW)
Sikkim*	0	0	0	0	0	0
Tamil Nadu	30183	11524	7057	7446	12540	68750
Telangana	17987	5057	1369	379	43	24835
Tripura*	0	0	0	0	0	0
Uttar Pradesh	101	0	0	0	0	101
Uttarakhand*	22	11	13	6	2	54
West Bengal	1050	0	0	0	0	1050
A & N Islands	392	351	313	199	22	1277
Chandigarh*	0	0	0	0	0	0
DNH*	0	0	0	0	0	0
Daman and Diu*	0	0	0	0	0	0
Delhi*	0	0	0	0	0	0
Lakshadweep ¹¹	6	1	16	8	0	31
Puducherry	146	92	132	12	0	382
Total in MW	340574	140429	82208	75004	57294	695509

^{*} In these states, even though the wind potential is indicated as negligible based on the applied methodology and land suitability analysis, there can be scattered potential pockets available for wind farm development due to the localized wind flows and such pockets can only be identified through in-situ measurements.

It is noted that wind potential to the extent of 132 GW is possible in high potential area with CUF greater than 32%, and wind potential of 57 GW is possible with CUF greater than 35%. The high wind potential regions are distributed in the states of Andhra Pradesh, Gujarat, Karnataka, Maharashtra and Tamil Nadu with scattered potential in Kerala, Madhya Pradesh, Telangana, Jammu & Kashmir and Rajasthan. Pockets of medium wind potential are located in states of Punjab, Haryana, Uttarakhand, Bihar, West Bengal, Odisha and North Eastern States. While areas with high wind potential and high CUF can be developed into large wind farms, those with lower CUF could be considered for distributed generation and also for wind solar hybrid for better utilization of the RE resources.

¹¹ Based on Actual measurements and extrapolation.



6. UN-EXPLOITED WIND POTENTIAL

This 120m wind mapping exercise has indicated the suitable sites for the wind farm development in the country. However, some of the potential locations are already being used by existing wind farms. As on March 2019, India has the wind power installed capacity of about 35 GW. Hence, these locations (Brown Field) cannot be utilized for the newer developments. If such locations are excluded from the potential map, the effective exploitable wind potential area (green field) can be clearly demarcated, which will be useful for the stakeholders for future wind farm development.

In order to estimate this un-exploited potential area, the existing wind turbine locations (information through Geo-tagging project) have been excluded from the wind potential map with the buffer of 6D to be in line with the MNRE guidelines. Figure 11 presents the existing wind turbine location available with NIWE.

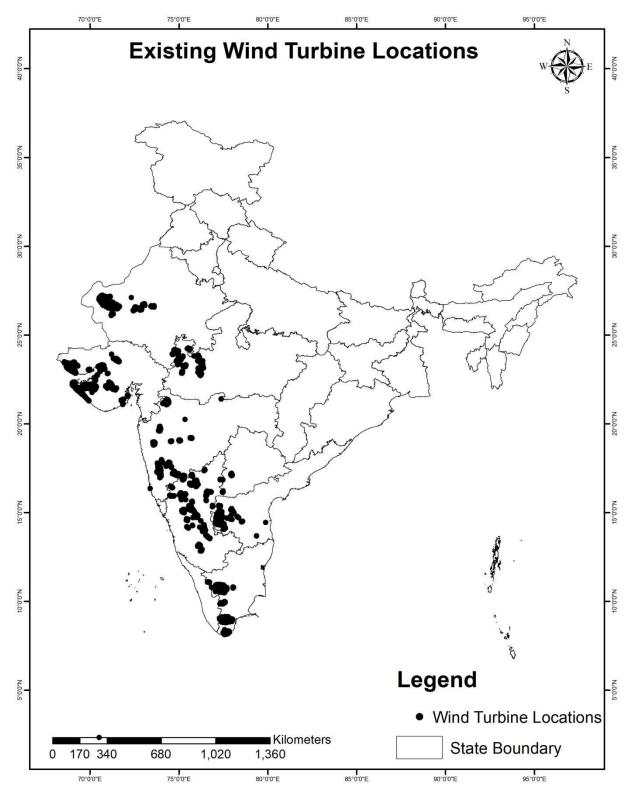


Figure 11: Existing Wind Turbine Locations of India



Excluding potential at existing wind turbine locations, following table represents the available green field wind potential for wind rich States in a CUF based matrix.

Table 7: CUF Matrix for un-exploited windy sites

State		(Green Field	(% CUF)		
State	25-28%	28-30%	30-32%	32-35%	>35%	Total
	(MW)	(MW)	(MW)	(MW)	(MW)	(MW)
Andhra	22144	14540	10221	10460	4045	72220
Pradesh	33144	14549	10331	10460	4845	73329
Gujarat	33564	26865	24446	27368	27336	139579
Karnataka	53737	28994	20445	13959	5865	123000
Kerala	366	193	180	358	1200	2297
Madhya	11854	2370	779	124	0	15127
Pradesh	11054	2370	177	124		15127
Maharashtra	47222	20345	13733	11880	3158	96338
Rajasthan	96221	26608	1596	27	0	124452
Tamil Nadu	30169	11515	7008	7314	11367	67373
Telangana	17986	5028	1339	379	43	24775
Total	324263	136467	79857	71869	53814	666270



7. SENSITIVITY ANALYSIS

7.1. WA120-WL:CL:FL - Sensitivity analysis with respect to weightage of land features

As stated earlier, it may become unrealistic to consider all suitable areas as 'available' for wind farm development due to various constraints. Land availability and the trend of land occupation is site-specific (in macro-scale at least state specific) and predicting the actual land availability may be difficult.

However, it is seen that different land use / occupation pattern is practiced in various states. For example, in Tamil Nadu it is found that about 70% of the wind farms are developed in the land features classified as "WA120-CL (Cultivable Land)" as per NRSC land use classification, whereas in the case of Gujarat it is about 35%. Similar analysis reveals that about 25% of wind farms in Tamil Nadu are developed in "WA120-WL (Wasteland)" classification, but for Gujarat, it is about 60%. The future land allocation trend / scenario will depend on supportive land policies of different state government and competing demand for land for other sectors.

It was, therefore, essential to simulate variation in land availability assumptions and its effect on wind potential. Thus sensitivity analysis was performed by assuming different availability percentages under various land categories (Wasteland, Cultivable Land and Forest Land).

The sensitivity analysis was done for high windy states (states with > 35% CUF viz., Andhra Pradesh, Gujarat, Karnataka, Maharashtra and Tamil Nadu), where land use pattern has significant impact in harnessing the potential and the same is summarized in Table 8. Further, the Table only captures and shows the potential change with CUF greater than 35% (P50 value), considering the effective land utilization.



Table 8: Sensitivity of Wind Potential (> 35% CUF) with respect to weightage of Land features

	State-wise Wind Potential (> 35% CUF) in MW					
Scenarios	Andhra Pradesh	Gujarat	Karnataka	Maharashtra	Tamil Nadu	Total
WA120-80:30:5*	5029	28841	5954	3635	12539	55998
WA120-80:30:10	5418	28902	6183	3746	12767	57016
WA120-80:30:15	5807	28964	6411	3858	12995	58035
WA120-80:30:20	6195	29025	6640	3970	13223	59053
WA120-80:50:5	5838	34884	9024	4344	17699	71789
WA120-80:50:10	6227	34945	9253	4455	17927	72807
WA120-80:50:15	6616	35007	9481	4567	18155	73826
WA120-80:50:20	7004	35068	9710	4679	18383	74844
WA120-80:70:5	6647	40927	12093	5053	22859	87579
WA120-80:70:10	7036	40988	12322	5164	23087	88597
WA120-80:70:15	7425	41050	12550	5276	23315	89616
WA120-80:70:20	7813	41111	12779	5388	23543	90634
WA120-80:80:5	7051	43949	13628	5407	25439	95474
WA120-80:80:10	7440	44010	13857	5518	25667	96492
WA120-80:80:15	7829	44072	14085	5630	25895	97511
WA120-80:80:20	8217	44133	14314	5742	26123	98529

WA120-80:30:5 depicts 80% Wasteland, 30% Cultivable land and 5% Forest land with > 35% CUF is available for wind farm development.

The detailed estimation sheet with respect to each scenario can be found in Appendix-1. Based on the sensitivity analysis, it is found that with increased land area utilization, the wind potential with over 35% CUF can reach up to 98 GW.

^{*}represents the base case (Wasteland: 80%, Cultivable Land: 30%, Forest Land: 5%)



7.2. WA120-ES - Sensitivity analysis with respect to suitability of land features

It is further noted that, even though the base map shows high wind potential in the elevated regions of Himalayan and North Eastern states, due to the land suitability assumptions applied in the study (especially with respect to elevation and slope) as detailed in Table 2, the technical wind potential becomes negligible in those regions. Though the land suitability assumptions are considered to reflect the present technology and land use patterns, with adequate efforts and emerging technologies the windy pockets of these complex sites of Himalayan and North Eastern states can also be utilized.

Considering this, a sensitivity analysis was carried out, especially for the Himalayan (Himachal Pradesh, Jammu & Kashmir and Uttarakhand) and North Eastern states (Arunachal Pradesh, Assam, Manipur, Meghalaya, Mizoram, Nagaland, Sikkim and Tripura) without excluding the snow covered and complex regions. Table 9 summarizes the results of such sensitivity analysis.

Table 9: Sensitivity of Wind Potential (> 25% CUF) of Himalayan & North Eastern States with respect to Suitability of Land features

State	WA120-WL	WA120-CL	WA120-FL	Total
State	(MW)	(MW)	(MW)	(MW)
Arunachal Pradesh	1963	20	47	2030
Assam	199	45	2	246
Himachal Pradesh	16943	1335	7	18285
Jammu and Kashmir	211324	1016	184	212524
Manipur*	0	0	0	0
Meghalaya*	1	0	0	1
Mizoram*	0	0	0	0
Nagaland*	0	0	0	0
Sikkim	1429	3	1	1433
Tripura*	0	0	0	0
Uttarakhand	2132	47	12	2191
Total in MW	233991	2466	253	236710

^{*} In these states, even though the wind potential is indicated as negligible based on the applied methodology and land suitability analysis, there can be scattered potential pockets available for wind farm development due to the localized wind flows and such pockets can only be identified through insitu measurements.



Thus, if the complex regions and snow-covered areas of the Himalayan and North Eastern states are considered as suitable for wind farm development, the installable wind potential of India increases to 931 GW i.e. by about 34%.



8. VALIDATION

Validation with actual measurements is essential in any model-based mapping. Globally, wind potential maps are being prepared using the numerical downscaling techniques from atmospheric models. In general, the following three inputs are used for downscaling and mapping.

- Assimilated re-analysis data sets which are gridded data, created through assimilating data collected from different sources at various time scale
- o Generalized elevation data
- Generalized land use land cover data

Due to the nature of inputs and methodology of prediction, the results generated using atmospheric models is always interpreted with caution. Due to the accuracy level of inputs and uncertainties in the downscaling techniques, the modeled results may not predict localized wind variations accurately. Although, this issue cannot be fully resolved but the error level of the modeled map can be quantified with the help of actual measurements.

In this study, physical measurements from 406 stations were used (after the removal of outliers) to validate the map result. The wind speeds at 120m was arrived at through measurement or derived with the help of power law index. Based on the validation study, the mean absolute percentage error of the map is found to be 5%. The scatter plot showing the comparison between actual measurements and model wind speeds is shown in figure below.



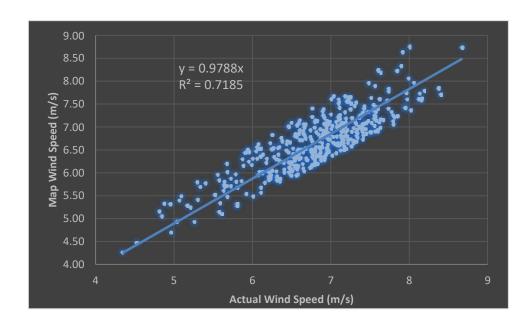


Figure 12: Scatter Plot showing the comparison between Estimated and Actual Wind Speed for 406 stations



9. OFFSHORE WIND POTENTIAL MAP

National Institute of Wind Energy (NIWE) was entrusted to carry out preliminary wind resource assessment and coordination of bathymetric / oceanographic studies for demarcation of the offshore wind energy blocks as per the National Offshore Wind Energy Policy notified by Ministry of New and Renewable Energy (MNRE) vide notification dated 6th October 2015.

India is blessed with a long coastline of 7600 km and an Exclusive Economic Zone (EEZ) of nearly two million sq.km. The United Nations Convention on the Law of the Sea (UNCLOS) gives the exclusive rights over India's Economic Exclusive Zone (200 Nautical Miles from baseline) within which it can exercise sovereign rights in relation to activities such as fisheries, production of energy from water currents and wind.

For any new offshore market, the cost drivers associated with different technologies vary significantly. The environmental constraints, seabed conditions and structure, wind resource, array layout grid connection, as well as the turbine technology for the site and the installation methods have to be correlated to understand the scale of opportunity and capital expenditure required to realize its development. Considering its potential various initiatives are being taken for the offshore wind development in the country through preliminary assessments, collaborative studies, etc.

One of such pre-feasibility studies for the offshore wind power development in Gujarat and Tamil Nadu was carried out under the Facilitating Offshore Wind energy in India (FOWIND) project, a consortium led by the Global Wind Energy Council (GWEC) during May 2015. As a part of this project, prefeasibility analysis of offshore zones in Gujarat and Tamil Nadu were carried out and eight potential zones were identified each off the coast of the States of Gujarat and Tamil Nadu.

Considering that an offshore wind resource map for the entire coastline of the country will be helpful, offshore map up to Exclusive Economic Zone (200 NM) has been prepared by NIWE using the satellite data. However this needs to be re-checked by fresh long term measurements to facilitate better and informed decisions.



This offshore wind map is prepared using QuikSCAT (Quick Scatterometer) monthly average surface wind data. The spatial resolution of the QSCAT data is 0.25deg Latitude x 0.25deg Longitude and the data period used for the analysis is from Nov 1999 to Oct 2009 (10 years). The NASA QuikSCAT (Quick Scatterometer) is an earth observation satellite carrying the SeaWinds scatterometer. Its primary mission is to measure the surface wind speed and direction over the ice-free global oceans. Scatterometers such as QuikSCAT emit pulses of low-power microwave radiation and measure the power reflected back to its receiving antenna from the wind-roughened sea surface. The surface winds are measured from the roughness of the sea surface based on measurements of radar backscatter cross section.

The data obtained from QuikSCAT satellite is at 10m (surface wind data) and the same has been extrapolated to 120m using power law index value of 0.11. The capacity Utilization Factor (CUF) has been estimated using the 120m extrapolated wind speed value with Weibull factor 'k' as 2. The map is prepared for the entire Exclusive Economic Zone (EEZ) of India – up to 200NM by interpolating the point values.

Figure 13 and Figure 14 represent the offshore wind speed and Capacity Utilization Factor (CUF) maps up to the Exclusive Economic Zone (EEZ) respectively.

It can be seen that areas off the coast of Tamil Nadu, Gujarat and Odisha have better offshore wind potential.



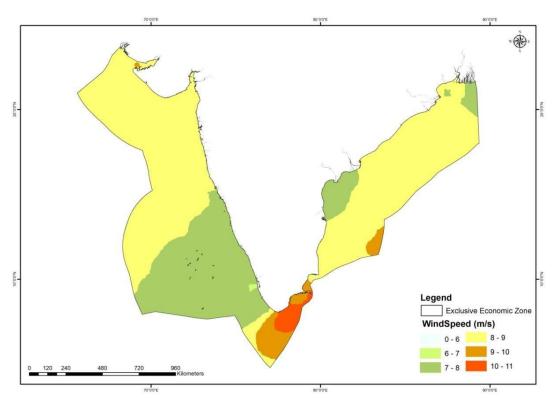


Figure 13: Offshore Wind speed map up to EEZ at 120m amsl

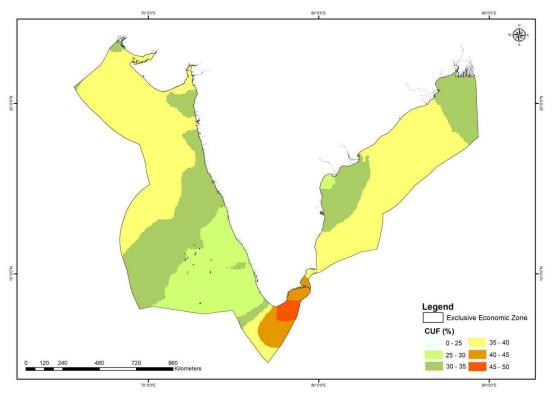


Figure 14: Offshore Wind Power Potential Map up to EEZ at 120m amsl



APPENDIX 1 - Sensitivity Analysis (Refer para 7 of Report)

WA120-80:30:5

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 30% of Land is available

➤ WA120-FL (Forest Land) : 5% of Land is available

State	WA120-WL	WA120-CL	WA120-FL	Total
State	(MW)	(MW)	(MW)	(MW)
Andhra Pradesh	3426	1214	389	5029
Gujarat	19715	9064	62	28841
Karnataka	1122	4604	228	5954
Maharashtra	2459	1064	112	3635
Tamil Nadu	4571	7740	228	12539
Total in MW	31293	23686	1019	55998

WA120-80:30:10

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 30% of Land is available
 WA120-FL (Forest Land) : 10% of Land is available

State	WA120-WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	1214	778	5418
Gujarat	19715	9064	123	28902
Karnataka	1122	4604	457	6183
Maharashtra	2459	1064	223	3746
Tamil Nadu	4571	7740	456	12767
Total in MW	31293	23686	2037	57016



WA120-80:30:15

➤ WA120-WL (Wasteland) : 80% of Land is available
 ➤ WA120-CL (Cultivable Land) : 30% of Land is available
 ➤ WA120-FL (Forest Land) : 15% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	1214	1167	5807
Gujarat	19715	9064	185	28964
Karnataka	1122	4604	685	6411
Maharashtra	2459	1064	335	3858
Tamil Nadu	4571	7740	684	12995
Total in MW	31293	23686	3056	58035

WA120-80:30:20

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 30% of Land is available
 WA120-FL (Forest Land) : 20% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	1214	1555	6195
Gujarat	19715	9064	246	29025
Karnataka	1122	4604	914	6640
Maharashtra	2459	1064	447	3970
Tamil Nadu	4571	7740	912	13223
Total in MW	31293	23686	4074	59053



WA120-80:50:5

➤ WA120-WL (Wasteland) : 80% of Land is available
 ➤ WA120-CL (Cultivable Land) : 50% of Land is available
 ➤ WA120-FL (Forest Land) : 5% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	2023	389	5838
Gujarat	19715	15107	62	34884
Karnataka	1122	7674	228	9024
Maharashtra	2459	1773	112	4344
Tamil Nadu	4571	12900	228	17699
Total in MW	31293	39477	1019	71789

WA120-80:50:10

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 50% of Land is available
 WA120-FL (Forest Land) : 10% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	2023	778	6227
Gujarat	19715	15107	123	34945
Karnataka	1122	7674	457	9253
Maharashtra	2459	1773	223	4455
Tamil Nadu	4571	12900	456	17927
Total in MW	31293	39477	2037	72807



WA120-80:50:15

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 50% of Land is available
 WA120-FL (Forest Land) : 15% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	2023	1167	6616
Gujarat	19715	15107	185	35007
Karnataka	1122	7674	685	9481
Maharashtra	2459	1773	335	4567
Tamil Nadu	4571	12900	684	18155
Total in MW	31293	39477	3056	73826

WA120-80:50:20

➤ WA120-WL (Wasteland) : 80% of Land is available
 ➤ WA120-CL (Cultivable Land) : 50% of Land is available
 ➤ WA120-FL (Forest Land) : 20% of Land is available

State	WA120-	WA120-	WA120-FL	Total
State	WL (MW)	CL (MW)	(MW)	(MW)
Andhra Pradesh	3426	2023	1555	7004
Gujarat	19715	15107	246	35068
Karnataka	1122	7674	914	9710
Maharashtra	2459	1773	447	4679
Tamil Nadu	4571	12900	912	18383
Total in MW	31293	39476	4074	74844



WA120-80:70:5

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 70% of Land is available
 WA120-FL (Forest Land) : 5% of Land is available

State	WA120-WL (MW)	WA120-CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	2832	389	6647
Gujarat	19715	21150	62	40927
Karnataka	1122	10743	228	12093
Maharashtra	2459	2482	112	5053
Tamil Nadu	4571	18060	228	22859
Total in MW	31293	55267	1019	87579

WA120-80:70:10

➤ WA120-WL (Wasteland) : 80% of Land is available
 ➤ WA120-CL (Cultivable Land) : 70% of Land is available
 ➤ WA120-FL (Forest Land) : 10% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	2832	778	7036
Gujarat	19715	21150	123	40988
Karnataka	1122	10743	457	12322
Maharashtra	2459	2482	223	5164
Tamil Nadu	4571	18060	456	23087
Total in MW	31293	55267	2037	88597



WA120-80:70:15

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 70% of Land is available
 WA120-FL (Forest Land) : 15% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	2832	1167	7425
Gujarat	19715	21150	185	41050
Karnataka	1122	10743	685	12550
Maharashtra	2459	2482	335	5276
Tamil Nadu	4571	18060	684	23315
Total in MW	31293	55267	3056	89616

WA120-80:70:20

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 70% of Land is available
 WA120-FL (Forest Land) : 20% of Land is available

State	WA120-	WA120-	WA120-FL	Total
State	WL (MW)	CL (MW)	(MW)	(MW)
Andhra Pradesh	3426	2832	1555	7813
Gujarat	19715	21150	246	41111
Karnataka	1122	10743	914	12779
Maharashtra	2459	2482	447	5388
Tamil Nadu	4571	18060	912	23543
Total in MW	31293	55267	4074	90634



WA120-80:80:5

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 80% of Land is available
 WA120-FL (Forest Land) : 5% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	3236	389	7051
Gujarat	19715	24172	62	43949
Karnataka	1122	12278	228	13628
Maharashtra	2459	2836	112	5407
Tamil Nadu	4571	20640	228	25439
Total in MW	31293	63162	1019	95474

WA120-80:80:10

➤ WA120-WL (Wasteland) : 80% of Land is available
 ➤ WA120-CL (Cultivable Land) : 80% of Land is available
 ➤ WA120-FL (Forest Land) : 10% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	3236	778	7440
Gujarat	19715	24172	123	44010
Karnataka	1122	12278	457	13857
Maharashtra	2459	2836	223	5518
Tamil Nadu	4571	20640	456	25667
Total in MW	31293	63162	2037	96492



WA120-80:80:15

➤ WA120-WL (Wasteland) : 80% of Land is available
 ➤ WA120-CL (Cultivable Land) : 80% of Land is available
 ➤ WA120-FL (Forest Land) : 15% of Land is available

State	WA120- WL (MW)	WA120- CL (MW)	WA120-FL (MW)	Total (MW)
Andhra Pradesh	3426	3236	1167	7829
Gujarat	19715	24172	185	44072
Karnataka	1122	12278	685	14085
Maharashtra	2459	2836	335	5630
Tamil Nadu	4571	20640	684	25895
Total in MW	31293	63162	3056	97511

WA120-80:80:20

WA120-WL (Wasteland) : 80% of Land is available
 WA120-CL (Cultivable Land) : 80% of Land is available
 WA120-FL (Forest Land) : 20% of Land is available

State	WA120-	WA120-	WA120-FL	Total
State	WL (MW)	CL (MW)	(MW)	(MW)
Andhra Pradesh	3426	3236	1555	8217
Gujarat	19715	24172	246	44133
Karnataka	1122	12278	914	14314
Maharashtra	2459	2836	447	5742
Tamil Nadu	4571	20640	912	26123
Total in MW	31293	63162	4074	98529



ANNEXURE 1 - The History of Wind Resource Assessment Programme in India

The Wind Power development programme in India¹² was initiated towards the last year of the Sixth Five Year Plan, in 1983-84. The first grid connected modern wind turbine in the country was commissioned at Veraval, Gujarat in 1985 as a demonstration project by Gujarat Energy Development Agency and JK Synthetics Ltd. The first grid connected wind farm (10 x 55 kW- Vestas wind turbines) in the country was set up at Mullaikkadu near Tuticorin, Tamil Nadu in January 1986 under the demonstration project of Government of India. In the same year, two more wind farms of 550 kW each were established along the coast at Devgad in Maharashtra and Okha in Gujarat. Demonstration projects have helped the private sector in making an easier SWOT analysis. In addition, the Government initiatives and promotional policies have supported and motivated the entrepreneurs to invest in the wind power projects.

In order to identify wind farmable sites in the country, the Government of India launched a national wind resource assessment programme in 1985. India faced a serious problem on information on wind resources of the country while windmills were making a comeback during the late 1970s. In fact, the first attempt of preparing the Indian Wind Map from the wind energy point of view was made by the National Aerospace Laboratories (NAL), Bangalore in 1960s based on the India Meteorological Department (IMD) data. As there was a need for detailed and more accurate data on winds for the wind energy estimation, the Commission for Additional Sources of Energy (Department of Science & Technology), had decided to compile the IMD data and the Field Research Unit, Bangalore of Indian Institute of Tropical Meteorology, Pune (IITM FRU) was engaged to carry out the work. Under the leadership of Ms. Anna Mani, Wind Energy Data for India was prepared and published in 1983. In this volume compilation of surface wind data recorded at 343 observatories and 65 upper wind stations with a detailed analysis of hourly wind speed and wind power at 37 stations of IMD was made. The compiled data was found useful in identifying regions where good wind energy potential was available.

¹² Indian Wind Atlas, 2010 by C-WET, ISBN 978-81-909823-0-6



Based on the data published in Wind Energy Data for India, four demonstration wind farms were established by the Ministry of New and Renewable Energy (MNRE, the then Department / Ministry of Non–Conventional Energy Sources (DNES/MNES)) in 1986 at Tuticorin (Tamil Nadu), Devgad (Maharashtra), Okha (Gujarat) and Puri (Odisha). The performance of the four-demonstration wind farms had indicated that wind data collected at meteorological observatories cannot provide an actual representation of the wind energy potential in the country. Moreover, large wind farms for the generation of power from wind are not expected to be near meteorological observatories. Realizing these facts the Department / Ministry of Non- Conventional Energy Sources (now Ministry of New and Renewable Energy, MNRE) decided to venture a National Wind Resource Assessment programme with dedicated wind monitoring stations to identify windy locations in the country. The task was assigned to the Field Research Unit, Bangalore of Indian Institute of Tropical Meteorology, Pune, (IITM-FRU) in mid 1980s in association with the National Aerospace Laboratories (NAL), Bangalore.

The National Wind Resource Assessment Programme was designed for the selection of windy sites, procurement of suitable instruments, design and fabrication of 20m tall masts, their installation at the selected sites and collection & processing of data. Nodal agency of each state also actively participated in the implementation of the programme. The programme was initially taken up in the states of Tamil Nadu, Maharashtra, Gujarat and Odisha. The surface and upper wind data collected by IMD in conjunction with the study of contour maps of scale 1:50000 published by Survey of India was of immense help in identifying the locations during field visits. The first wind monitoring station of the country was established at Sultanpet in the exit region of Palghat gap, Coimbatore district, Tamil Nadu in 1986. Subsequently the programme was extended to other states like Andhra Pradesh, Rajasthan, Karnataka, Madhya Pradesh, etc. Under the programme, 20m tall tubular guyed masts (tilt-up design) with instrumentation at two levels viz. at 10 and 20m above ground levels were commissioned at carefully chosen locations. All types of terrain viz-inland plains, coastal plains, smooth or rugged hills / ridge tops, mountain tops, valleys, foothills, deserts, plateaus, islands, etc. were considered. Based on the data collected under the exclusive wind-monitoring programme, potential locations were identified even in the interior parts of the country. As the wind monitoring is a continuous programme since 1985, the programme is



extended to almost all the states, union territories of India including islands. Commissioning and closure of wind monitoring stations has been a continuous process under the national programme. The FRU of IITM Bangalore had collected wind data from 448 stations in various states and Union Territories. After the establishment of the National Institute of Wind Energy (formerly, C-WET) in Chennai, the National Wind Resource Assessment Programme has been transferred to NIWE and the activities of FRU-IITM was terminated. Since 2001, the National Wind Resource Assessment Programme is being executed by NIWE on behalf of MNRE. Over the period, the height of wind turbines have seen upward trend and thus it was also necessary to increase the height of wind monitoring masts to measure the wind close to the hub height. Hence, in order to fulfill the industry need, NIWE started to install taller masts. Initially the wind monitoring was carried out only in known windy areas. Now it is extended to any area, which is not covered in earlier projects to complete the Indian Wind Power Mapping.

Under the programme 50m, 80m, 100m and 120m height masts have been commissioned to collect dedicated wind resource data at multi-level. The basic data that are being collected is 10 minutes (averaged), the industry standard, based on 2 seconds samples of wind speed and direction data at multi-level. The data collected under the programme is being used widely to establish wind farms in the country and most of the wind farms established in the country till now is based on the reference data collected under this National Programme of wind resource assessment directly or indirectly.

All the states and the major union territories are covered under this programme. More stations are being added every year so that more uncovered areas in all the states are studied scientifically. The data collected also serves as data bank for the preparation of national wind potential maps and other research purposes. Under the programme, cumulatively 877 stations have been established as on December 2018. The Ministry is continuing this project through NIWE in association with State Nodal Agencies.

As a part of the programme, in order to provide the authentic knowledge of the wind energy availability in a region of interest to the stakeholders, the Ministry decided to publish the data in a book form. Nine volumes of Wind Energy data books, which provide extensive information of the sites where actual wind measurements carried out, have been published so far. The first volume of Wind Energy Resource Survey in India



was published in 1990 and the latest one in this series is the Wind Energy Resource Survey in India Volume IX in 2017. M/s. Allied Publishers, New Delhi brought out the first four volumes, during the period 1990 to 1996 and the volumes V to IX were directly published by IITM-FRU / NIWE (formerly, C-WET) respectively in 1998, 2001, 2005, 2012 and in 2017. The continuous and reliable data availability for one or more year from a given station was the main consideration for the inclusion of the monitoring stations in these volumes.

As a part of outcome of this study, wind power density maps have been prepared based on the measurements and meso-scale models. In 2005, the wind power potential for 10 states at 50m has been estimated with relevant assumptions. From the discrete values of WPD at individual locations, the wind power potential over an extended area of land have been estimated. In the year 2010, Indian wind atlas was prepared with a combined effort from RISO-DTU, Denmark using sophisticated meso-scale modelling technique called Karlsruhe Atmospheric Meso-scale Model (KAMM). Subsequently, in 2015 the Indian Wind potential map 100m AGL (Above Ground Level) was prepared.



ANNEXURE 2 - Numerical Modelling

The core of the technical modelling approach for this work is the atmospheric model Weather Research and Forecasting System (WRF) developed by NCAR/NCEP. The WRF-system is a community-based, open-source model, where the latest advances in physics and numerics are incorporated in a modular way. It represents a cutting-edge modelling technology as well as optimized dynamic and physical cores. It includes a nest domain, allowing zooming atmospheric circulation down to near wind-farm resolution.

The effort to develop WRF has been a collaborative partnership, principally involving the National Center for Atmospheric Research (NCAR), the National Oceanic and Atmospheric Administration (NOAA), the National Centers for Environmental Prediction (NCEP), the Forecast Systems Laboratory (FSL), the Air Force Weather Agency (AFWA), the Naval Research Laboratory, the University of Oklahoma, and the Federal Aviation Administration (FAA). WRF allows researchers to conduct simulations reflecting either real data or idealized configurations. WRF provides operational forecasting a model that is flexible and efficient computationally, while unlocking the advances in physics, numeric and data assimilation contributed by the research community.

WRF model has a long record on usage and it is employed operational in many weather services, cutting-edge research activities and different industry applications. WRF development has engaged a wide community of users, which meant large peerreview validations analysis, and upgrading of advances in the different components of the weather & climate modelling science.

WRF model is now the first generation of multi-scale chain modelling that can seamlessly go from regional to wind farm scales. Regarding, micro-scale backed, WRF incorporates innovation planetary boundary layer sub model (PBL) that can handle effectively turbulence and flow adjustments due to high-resolution orographic effects. Moreover, WRF is a unique solution to provide dynamic representation of wind flow at wind farm resolution including mechanical and thermal turbulence.

WRF model includes a set of sub-models to treat dynamically and physically flow regime at very high resolution. These modules employ non-linear representations of different topography induced mechanisms.



Experience acquired from the studies of Vortex in more than 24,000 simulations completed with thousands of them checked against measurements has proven that the WRF model at a 500m resolution produces a realistic representation of flow circulation induced by high-resolution topography effects such as valleys, sea-land transition, hills, etc. By preserving the continuity of the WRF modelling chain, a more consistent site-specific assessment of wind energy parameters can be obtained, minimizing the impact of any artificial interpolation or adequation between different atmospheric scales.

Model Run

Under this study, the model has been driven by large-scale conditions prescribed by the latest generation of re-analysis projects for the satellite period: NCEP CFS/CFSR. Further, the re-gridded versions of SRTM (no-void) altimetry data were employed to prescribe altimetry conditions. The ESA Globcover (300m) land use database was employed to characterize land-use classes. Seasonal variation data from ESA Globcover will be included to better prescribe albedo effects during winter periods. WRF (Weather & Research Forecast) model is used in order to downscale Reanalysis datasets to the final 500m x 500m resolution through nested domains. Nesting is performed at 27km, 3km, 1km and 500m, each resolution adequate for different scales and characteristic phenomena included in the WRF model. Thus, the WRF model provides output variables at each of the 500m x 500m grid points and therefore no interpolation methods are applied for generating the results. Each of the grid points is directly written to the final files avoiding any error or truncation issues deriving from interpolation techniques. In relation to the complex terrain treatment, no different code is applied. The WRF model is capable of modelling the wind at different resolutions and each of the scales is treated accordingly with the Navier-Stokes equations and the corresponding PBL & Surface Layer schemes parameterizations available in the model, which are widely accepted by the wind industry community. The modelling flow chart is shown in Figure A.1.



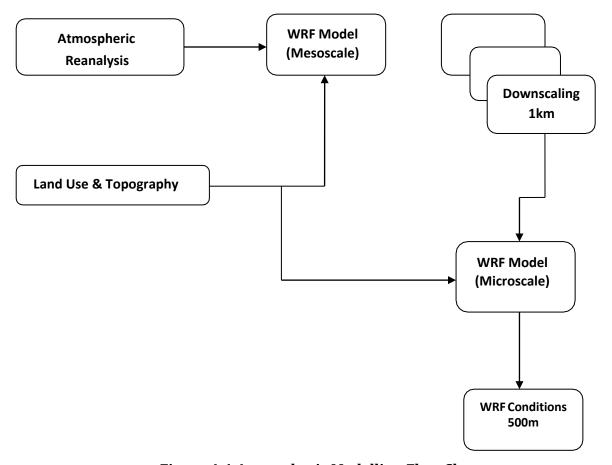


Figure A.1 Atmospheric Modelling Flow Chart

Methodology to derive Main Variables

The WRF model provides Wind Speed, Temperature & Pressure among other variables at each of the 500m x 500m grid points and any height between ground level and the troposphere. This allows us to estimate the wind power density by making use of the wind speed and density on an hourly basis -a general gas law for air is used for deriving density values from pressure & temperature.

Joint frequency distribution is obtained by binning the wind speed in 1m/s bins from 0 to 1, 1 to 2 and so on, and binning the wind direction in 30 degrees sectors north centered, that is from -15 to 15, 15 to 45 and so on. The joint frequency distribution can be presented in percentage or number of hours per year. Weibull Parameters are computed by using the WAsP assumption, which emphasizes the most energetic part of the histogram in the Weibull fitting.



Uncertainty of the results is estimated by running some different configurations of WRF model that is different turbulent schemes and slightly different initial conditions, which perturb the model and give an indication on how sensitive the studied region is to some changes in the model. The generated results by the different configurations are then post processed and mixed up in order to have an idea of how wide / uncertain the wind distribution.



ANNEXURE 3 - Data Sources

Macro-scale meteorological inputs come from the latest NCEP version of reanalysis: Climate Forecast System Reanalysis (CFSR) that was completed over the 31year period of 1979 to 2009 in January 2010. The CFSR was designed and executed as a global, high resolution, coupled atmosphere-ocean-land surface-sea ice system to provide the best estimate of the state of these coupled domains over this period. The current CFSR will be extended as an operational, real time product into the future. The CFSR relative to most, if not all, previous reanalysis include coupling of atmosphere and ocean during the generation of the 6 hour guess field, an interactive sea-ice model, and assimilation of satellite radiances by the Grid-point Statistical Interpolation scheme over the entire period. The CFSR global atmosphere resolution is ~38km (T382) with 64 levels extending from the surface to 0.26hPa. The global ocean is 0.25° at the equator, extending to a global 0.5° beyond the tropics, with 40 levels to a depth of 4737m. The global land surface model has 4 soil levels and the global sea ice model has 3 levels. With these variable parameters, the analyzed state will include estimates of changes in the Earth system climate. All available conventional and satellite observations were included in the CFSR. Satellite observations were used in radiance form and were bias corrected with "spin up" runs at full resolution, taking into account variable CO₂ concentrations. This procedure enabled smooth transition of the climate record due to evolutionary changes in the satellite observing system. CFSR atmospheric, oceanic and land surface output products are available at an hourly time resolution and 0.5° horizontal resolution. This reanalysis will serve many purposes, including, providing the basis for most of NCEP Climate Prediction Center's operational climate products by defining the mean states of the atmosphere, ocean, land surface and sea ice over the next 30-year climate normal (1981- 2010); provide initial conditions for historical forecasts required to calibrate operational NCEP climate forecasts and provide estimates and diagnoses of the earth's climate state, over the satellite data period, for community climate research. Preliminary analysis of the CFSR output indicates a product far superior in most respects to the reanalysis of the mid-1990s. The previous NCEP reanalysis have been one of the most used NCEP products in history, there is every reason to believe the CFSR will supersede these older products both in scope and quality, because it is higher in time and space resolution, covers the



atmosphere, ocean, sea ice and land, and was executed in a coupled mode with more modern assimilation system and forecast model.

SRTM (Shuttle Radar Topography Mission)

Topography data comes from the Shuttle Radar Topography Mission (SRTM), which obtained elevation data on a near-global scale to generate the most complete highresolution digital topographic database of Earth. The Shuttle Radar Topography Mission (SRTM) was flown aboard the space shuttle Endeavour February 11-22, 2000. The National Aeronautics and Space Administration (NASA) and the National Geospatial-Intelligence Agency (NGA) participated in an international project to acquire radar data, which were used to create the first near-global set of land elevations. The radars used during the SRTM mission were actually developed and flown on two Endeavour missions in 1994. The C-band Space borne Imaging Radar and the X-Band Synthetic Aperture Radar (X-SAR) hardware were used on board the space shuttle in April and October 1994 to gather data about Earth's environment. The technology was modified for the SRTM mission to collect interferometric radar, which compared two radar images or signals taken at slightly different angles. This mission used single-pass interferometer, which acquired two signals at the same time by using two different radar antennas. An antenna located on board the space shuttle collected one data set and the other data set was collected by an antenna located at the end of a 60-meter mast that extended from the shuttle. Differences between the two signals allowed for the calculation of surface elevation.

Endeavour orbited Earth 16 times each day during the 11-day mission, completing 176 orbits. SRTM successfully collected radar data over 80% of the Earth's land surface between 60° north and 56° south latitude with data points posted every 1 arc-second (approximately 30 meters).

SRTM Non-Void Filled elevation data (used for WRF modelling) were processed from raw C-band radar signals spaced at intervals of 1 arc-second (approximately 30 meters) at NASA's Jet Propulsion Laboratory (JPL). This version was then edited or finished by the NGA to delineate and flatten water bodies, better define coastlines, remove spikes and wells, and fill small voids. Data for regions outside the United States



were sampled at 3 arc-seconds (approximately 90 meters) using a cubic convolution resampling technique for open distribution.

SRTM 1 Arc-Second Global elevation data (used for Elevation & Slope suitability analysis in the study) offer worldwide coverage of void filled data at a resolution of 1 arcsecond (30 meters) and provide open distribution of this high-resolution global data set.


ESA Globcover

Land cover data for the WRF model comes from ESA GlobCover Land Cover I product derived by an automatic and regionally tuned classification of a time series of MERIS FR mosaics. Its 22 land cover global classes are defined with the UN Land Cover Classification System (LCCS). Each mosaic product is available in the Hierarchical Data Format-EOS2 (HDF) and is organized on a 5° by 5° tiling without any overlap. 2592 tiles (72 horizontal tiles x 36 vertical tiles) therefore cover the entire Earth. Only tiles including land cover are processed, which reduces the number of available tiles. The GlobCover products are based on ENVISAT's Medium Resolution Imaging Spectrometer (MERIS) Level I B data acquired in Full Resolution mode with a spatial resolution of 300 meters. For the generation of the Level I B data, the raw data acquisitions have been resampled on a path-oriented grid, with pixel values having been calibrated to match the Top of Atmosphere (TOA), radiance.

Land Use Land Cover Data (LULC) - NRSC

National Remote Sensing Centre (NRSC) provides ortho-rectified, multi temporal land use land cover data for the entire country at different scale levels. In this project, land use land cover (LULC) data at 1:250K scale with 56m resolution obtained from NRSC/ISRO, Hyderabad has been utilized for land use identification and exclusion. The data set covers the period of July 2012 to May 2013. NRSC 'Level II' classification would be appropriate to segregate different LULC classes. There are 19 classes available in NRSC Level – II classification. The sample pictorial representation of the same for Tamil Nadu is shown in Figure A.2.



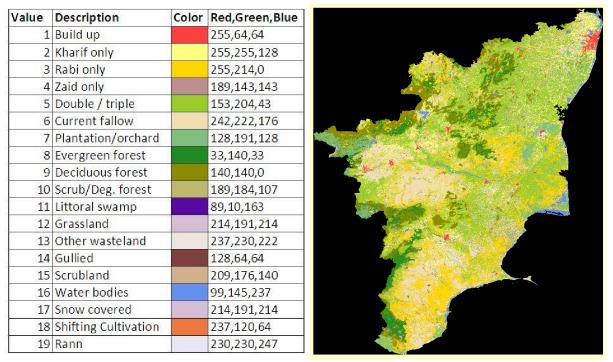

Source: NRSC, Hyderabad

Figure A.2 RSC LULC (Land Use Land Cover) Sample for Tamil Nadu

National Natural Resources Management System (NNRMS)

The National Natural Resources Management System (NNRMS), a national level inter-agency system, set-up in 1983 and chaired by the Member, Planning Commission, Govt. of India. The National Natural Resources Management System (NNRMS) supports the national requirements of natural resources management and developmental needs by generating a proper and systematic inventory of natural resources. In doing so, NNRMS adopts various advanced technologies of satellite and aerial remote sensing; Geographical Information Systems (GIS); precise Positioning Systems; database and networking infrastructure and advanced ground-based survey techniques. NNRMS standards have been adopted to enable technologies – imaging, GIS, GPS and applications – thematic mapping, services, etc. to work together. Over the past twenty years, the National Natural Resources Management System (NNRMS) has steered the generation of spatial information using remote sensing data from various IRS missions. Through a wide variety of user driven projects, a rich base of map information for the country has been generated. An important element of the NNRMS is the task of encapsulating the entire



spatial data into a Natural Resources Repository (NRR) and making it accessible to citizens, society, private enterprise and government.

To bring a systematization and "automation" in the process of mapping and GIS, ISRO had spearheaded and prepared the National (Natural) Resource Information System (NRIS) standards in 1998. Accordingly, the NRIS standards have become the de facto GIS standards for database creation and organization in the country. The spatial layers of the NRR are stored in a geo database. This database is referred to as Natural Resources Database (NRDB). The NRDB contents adhere to a naming convention and category coding as specified in the NNRMS standards document. From NRDB the following layers (Table A.1) have been extracted and utilized for this study.

Table A.1 NNRMS Layers used for the Study

S.no.	Layer Name	Code	Coordinate System
1	State Boundary	nrdb_3226	
2	Reservoir	nrdb_3232	
3	River	nrdb_3233	
4	Golden Quadrel Road	nrdb_3235	
5	National Highway	nrdb_3236	WGS84
6	Railway	nrdb_3238	
7	District Roads	nrdb_3241	
8	Rural Roads	nrdb_3242	

World Database on Protected Areas (WDPA)

The World Database on Protected Areas (WDPA) is the most comprehensive global spatial dataset on marine and terrestrial protected areas available. Protected areas are internationally recognized as major tools in conserving species and ecosystems. The WDPA is a joint project of UNEP and IUCN, produced by UNEP-WCMC and the IUCN World Commission on Protected Areas working with governments and collaborating NGOs.



Since 1981 UNEP-WCMC, through its Protected Areas Programme, has been compiling this information and making it available to the global community. The overall goal for the World Database on Protected Areas is to provide the most comprehensive and authoritative global dataset on national parks and protected areas that answers key questions about sustainable development informing decision makers and policy makers. Mandate for the assessment The WDPA includes the "UN List of Protected Areas" mandated by the UN Economic and Social Council (res. 713 XXVII 1959) to be compiled from officially delegated national authorities on protected areas. In addition to the UN List mandate, the WDPA is specifically mentioned in many decisions and recommendations of the CBD and IUCN, and serves to fulfill an even longer list of mandates on protected areas, ecosystem services and biodiversity protection as the recognized authoritative source of comprehensive information on the global protected areas network. WDPA contains the data in both point and polygon formats. In this study, protected zones, which are drawn as polygons (so that the boundary of the protected area could be properly represented) have been considered for area corrections, with intense validation with Google Earth.

Airport Details

Airport / Helipad location details have been identified from satellite images, verified through Google Earth Pro software with the base support from online data sources viz., www.sharegeo.ac.uk. In addition, intense on-line review has also been performed to identify / assure the airport locations, including defense airports, under construction airports, etc. All the airport locations have been given circular buffer of 10km and the buffered zone was later removed from the wind potential map. Helipad locations are not considered for exclusion in this analysis.



SYMBOLS AND ABBREVIATIONS

Symbol	Details
D	Rotor Diameter
GW	Gigawatt
MW	Megawatt

Acronym	Details
AFWA	Air Force Weather Agency
agl	above ground level
amsl	above mean sea level
AWiFS	Advanced Wide Field Sensor
BF	Brown Field
CFSR	Climate Forecast System Reanalysis
CUF	Capacity Utilization Factor
C-WET	Centre for Wind Energy Technology
DTU	Technical University of Denmark
FAA	Federal Aviation Administration
FSL	Forecast Systems Laboratory
GF	Green Field
GIS	Geographic Information System
GPS	Global Positioning System
HDF	Hierarchical Data Format
IITM-FRU	Indian Institute of Tropical Meteorology- Field Research Unit
IMD	India Meteorological Department
ISRO	Indian Space Research Organisation
IUCN	International Union for Conservation of Nature
JPL	Jet Propulsion Laboratory
LCCS	Land Cover Classification System
LULC	Land Use Land Cover



Acronym	Details
MNRE	Ministry of New and Renewable Energy
NAL	National Aerospace Laboratories
NASA	National Aeronautics and Space Administration
NCAR	National Center for Atmospheric Research
NCEP	National Centers for Environmental Prediction
NGA	National Geospatial-Intelligence Agency
NGO	Non-governmental Organization
NIWE	National Institute of Wind Energy
NM	Nautical Mile
NNRMS	National Natural Resources Management System
NOAA	National Oceanic and Atmospheric Administration
NRDB	Natural Resources Database
NRIS	National (Natural) Resource Information System
NRSC	National Remote Sensing Centre
PBL	Planetary Boundary Layer
RE	Renewable Energy
SOI	Survey of India
SRTM	Shuttle Radar Topography Mission
SWOT	Strengths, Weaknesses, Opportunities and Threats
UNEP	United Nations Environment Programme
WAsP	Wind Atlas Analysis and Application Programme
UNEP-WCMC	UN Environment World Conservation Monitoring Centre
WDPA	World Database on Protected Areas
WRF	Weather Research and Forecasting System
X-SAR	X-Band Synthetic Aperture Radar

